


Cartridge

300 BLK - 220 grain

Version 9.0

NOSLER®

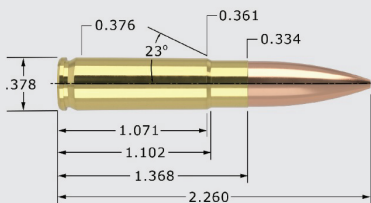

300 BLK - 220 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip®	BT	220gr. RNBT	2.100"	0.472	0.331	
Custom Competition®	CC	220gr. HPBT	2.260"	0.690	0.331	
CASE TYPE:	Nosler	PRIMER TYPE	WSR			
CASE HOLDS:	13.1 Gr. WATER	BARREL Length/Make	16" Pac-Nor			
		BARREL Twist	1-8"			
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
H4198	11.0 * MAX.	1100	94%			
	10.0	1040	86%			
	9.0	980	77%			
IMR 4227	11.0 * MAX.	1148	100%			
	10.0	1077	91%			
	9.0	1006	82%			
AA 1680	13.0 * MAX.	1192	**	104%		
	12.0	1085	96%			
	11.0	978	88%			
2400	9.5 MAX.	1213	82%			
	8.5 *	1078	74%			
	7.5	943	65%			
Enforcer	10.0 * MAX.	1219	80%			
	9.0	1080	72%			
	8.0	942	64%			
N110	10.0 * MAX.	1231	**	100%		
	9.0	1109	90%			
	8.0	987	80%			
AA 5744	11.5 * MAX.	1241	**	101%		
	10.5	1118	92%			
	9.5	996	83%			
H110	10.5 * MAX.	1258	82%			
	9.5	1113	74%			
	8.5	967	66%			
W296	10.5 * MAX.	1277	82%			
	Most Accurate	9.5	1124	74%		
	Powder Tested	8.5	971	66%		
Lil'Gun	10.0 MAX.	1302	80%			
	9.0 *	1190	72%			
	8.0	1078	64%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load