


# Cartridge

## 300 Rem SA Ultra Mag - 220 grain

Version 9.0

# NOSLER®

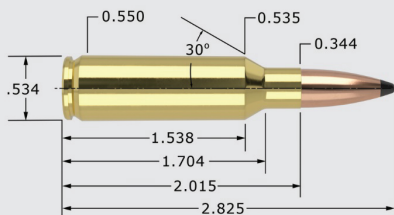

## 300 Rem SA Ultra Mag - 220 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	2.825"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	<b>CC</b> 220gr. HPBT	2.825"	0.690	0.331
Partition®	<b>PT</b> 220gr. Semi-Spitzer	2.825"	0.351	0.331

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	65.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
-------------	------------------	--------------------	-----------------------

<b>H414</b> Most Accurate Powder Tested	59.0	MAX. 2652		95%
	57.0 *	2571		91%
	55.0	2491		88%
<b>W760</b>	58.0	MAX. 2654		93%
	56.0 *	2570		90%
	54.0	2487		87%
<b>IMR 4350</b>	59.0	MAX. 2664		97%
	57.0 *	2575		94%
	55.0	2486		90%
<b>RL19</b>	61.0	MAX. 2666		** 102%
	59.0 *	2577		99%
	57.0	2488		95%
<b>H4350</b>	58.5 *	MAX. 2673		95%
	56.5	2584		92%
	54.5	2494		89%
<b>N160</b>	60.0	MAX. 2678		** 103%
	58.0	2599		99%
	56.0 *	2519		96%
<b>N550</b>	57.5	MAX. 2687		98%
	55.5 *	2598		95%
	53.5	2509		91%
<b>Hunter</b>	61.0	MAX. 2691		97%
	59.0 *	2604		94%
	57.0	2517		90%
<b>RL22</b>	65.5 *	MAX. 2751		** 110%
	63.5	2668		** 106%
	61.5	2585		** 103%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load