


Cartridge

300 Wby Mag - 220 grain

Version 9.0

NOSLER®

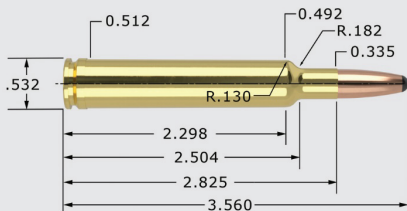

300 Wby Mag - 220 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.560"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	220gr. HPBT	3.560"	0.690	0.331
Partition®	PT	220gr. Semi-Spitzer	3.560"	0.351	0.331
CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	90.2	Gr. WATER	BARREL Length/Make	26" Pac-Nor	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 4350	68.5 * MAX.	2643	85%		
Most Accurate	66.5	2569	83%		
Powder Tested	64.5	2496	80%		
N165	75.5 * MAX.	2722	93%		
	73.5	2654	91%		
	71.5	2586	88%		
H1000	81.0 MAX.	2724	95%		
	79.0	2661	93%		
	77.0 *	2598	90%		
RL19	72.0 MAX.	2745	87%		
	70.0	2671	84%		
	68.0 *	2597	82%		
IMR 4350	70.5 * MAX.	2770	84%		
	68.5	2697	81%		
	66.5	2623	79%		
Magnum	83.0 MAX.	2777	93%		
	81.0 *	2693	91%		
	79.0	2609	89%		
RL22	75.0 * MAX.	2805	90%		
	73.0	2726	88%		
	71.0	2647	86%		
IMR 7828	77.0 MAX.	2827	91%		
	75.0	2746	88%		
	73.0 *	2664	86%		
H4831SC	76.0 * MAX.	2833	88%		
	74.0	2768	85%		
	72.0	2703	83%		
Norma MRP	80.0 MAX.	2842	97%		
	78.0	2773	95%		
	76.0 *	2704	93%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load