


Cartridge

308 Norma Mag - 125 grain

Version 9.0

NOSLER®

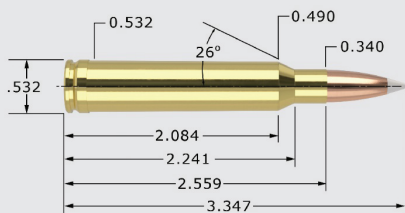

308 Norma Mag - 125 grain

30 Cal. (.308")

MAXIMUM O.A.C.L.		3.347"	B.C.	S.D.
AccuBond®	AB	125gr. Spitzer	0.366	0.188
Ballistic Tip®	BT	125gr. Spitzer	0.366	0.188
CASE TYPE:	Norma	PRIMER TYPE	Fed 215	
CASE HOLDS:	84.0 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
N150	64.0 * MAX.	3335	90%	
		3264	87%	
		3193	84%	
IMR 4320	66.0 MAX.	3350	85%	
		3220	83%	
	62.0 *	3090	80%	
IMR 4350	75.0 MAX.	3352	95%	
		3247	93%	
	71.0 *	3142	90%	
N160 Most Accurate Powder Tested	75.5 MAX.	3426	100%	
	73.5	3331	97%	
	71.5 *	3237	95%	
H414	71.5 * MAX.	3430	89%	
		3340	86%	
		3250	84%	
RL15	65.5 MAX.	3457	81%	
		3376	79%	
	61.5 *	3295	76%	
H4831	79.0 MAX.	3532	98%	
		3447	95%	
	75.0 *	3362	93%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load