


# Cartridge

## 338 Lapua Mag - 180 grain

Version 9.0

# NOSLER®

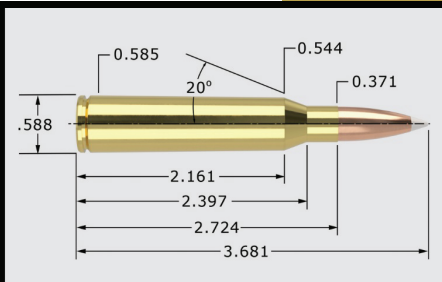

## 338 Lapua Mag - 180 grain

## 338 Cal. (.338")

<b>MAXIMUM SAAMI O.A.C.L.</b>	<b>3.681"</b>	<b>TESTED O.A.C.L.</b>	<b>B.C.</b>	<b>S.D.</b>
AccuBond®	<b>AB</b> 180gr. Spitzer	3.580"	0.372	0.225

<b>CASE TYPE:</b>	Nosler	<b>PRIMER TYPE</b>	Fed 215
<b>CASE HOLDS:</b>	107.0 Gr. WATER	<b>BARREL Length/Make</b>	26" Pac-Nor
		<b>BARREL Twist</b>	1-10"

<b>POWDER TYPE</b>	<b>POWDER CHG. GRS.</b>	<b>MUZZLE VEL. F.P.S.</b>	<b>LOAD DENSITY (VOLUME)</b>
<b>H414</b>	84.5 MAX.	3331	82%
Most Accurate	82.5 *	3273	80%
Powder Tested	80.5	3214	78%
<b>Magnum</b>	109.0 MAX.	3349	** 103%
	107.0	3292	** 102%
	105.0 *	3234	100%
<b>H4831SC</b>	99.0 MAX.	3404	96%
	97.0	3340	94%
	95.0 *	3277	92%
<b>H1000</b>	104.0 * MAX.	3409	** 103%
	102.0	3369	** 101%
	100.0	3329	99%
<b>Retumbo</b>	108.0 MAX.	3413	** 109%
	106.0	3351	** 107%
	104.0 *	3289	** 105%
<b>H4350</b>	90.5 MAX.	3415	90%
	88.5 *	3344	88%
	86.5	3274	86%
<b>RL19</b>	95.5 MAX.	3449	97%
	93.5 *	3368	95%
	91.5	3288	93%
<b>IMR 4831</b>	94.5 MAX.	3452	94%
	92.5 *	3365	92%
	90.5	3279	90%
<b>IMR 7828</b>	100.0 MAX.	3461	99%
	98.0 *	3370	97%
	96.0	3279	95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load