


Cartridge

44 S&W Special - 200 grain

Version 9.0

NOSLER®

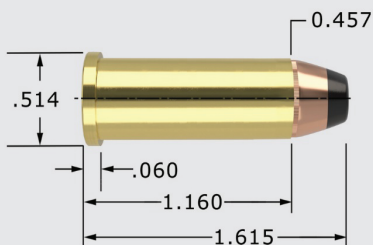

44 S&W Special - 200 grain

44 Cal. (.429")

MAXIMUM SAAMI O.A.C.L.		1.615"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®		SHG 200gr. JHP	1.455"	0.151	0.155
CASE TYPE:	Remington	PRIMER TYPE		Rem 2-1/2	
CASE HOLDS:	22.5 Gr. WATER	BARREL Length/Make		8.2" Douglas	
		BARREL Twist		1-20"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Bullseye	6.0 MAX. 893		42%		
	5.5 * 845		39%		
	5.0 797		35%		
AA #5	8.6 MAX. 900		40%		
	8.1 840		38%		
	7.6 * 780		36%		
Hi-Skor 700-X	5.3 * MAX. 902		47%		
	4.8 837		43%		
	4.3 772		38%		
AutoComp	7.1 MAX. 937		37%		
	6.6 * 864		35%		
	6.1 790		32%		
Herco	8.0 * MAX. 940		60%		
	7.5 870		56%		
	7.0 800		53%		
Unique	8.0 * MAX. 948		60%		
	7.5 883		56%		
	7.0 818		53%		
HS-6	9.0 MAX. 960		44%		
	Most Accurate 8.5 * 906		41%		
	Powder Tested 8.0 851		39%		
Power Pistol	8.5 MAX. 968		50%		
	8.0 917		47%		
	7.5 * 865		44%		
IMR 4227	16.4 MAX. 972		87%		
	15.9 * 897		84%		
	15.4 822		82%		
Universal	6.9 * MAX. 977		49%		
	6.4 894		45%		
	5.9 811		42%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load