


# Cartridge

## 45-70 Govt. - 300 grain (Strong Action Only)

Version 9.0

# NOSLER®

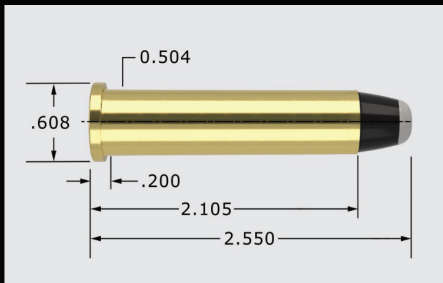

## 45-70 Govt. - 300 grain (Strong Action Only) 458 Cal. (.458")

<b>MAXIMUM SAAMI O.A.C.L.</b>	<b>2.550"</b>	<b>TESTED O.A.C.L.</b>	<b>B.C.</b>	<b>S.D.</b>
CT® Ballistic Silvertip®	<b>BST</b> 300gr. RN	2.550"	0.191	0.204

<b>CASE TYPE:</b>	Winchester	<b>PRIMER TYPE</b>	WLR
<b>CASE HOLDS:</b>	64.6 Gr. WATER	<b>BARREL Length/Make</b>	24" Pac-Nor
		<b>BARREL Twist</b>	1-20"

<b>POWDER TYPE</b>	<b>POWDER CHG. GRS.</b>	<b>MUZZLE VEL. F.P.S.</b>	<b>LOAD DENSITY (VOLUME)</b>
<b>AA 2015</b>	58.0 MAX.	2130	** 102%
Most Accurate Powder Tested	56.0	2050	99%
	54.0 *	1970	95%
<b>IMR 4227</b>	47.5 MAX.	2151	88%
	45.5	2068	84%
	43.5 *	1986	80%
<b>RL7</b>	53.0 MAX.	2180	89%
	51.0	2118	86%
	49.0 *	2056	82%
<b>IMR 4198</b>	51.5 MAX.	2232	92%
	49.5 *	2129	89%
	47.5	2026	85%
<b>H335</b>	67.0 MAX.	2274	** 105%
	65.0 *	2226	** 102%
	63.0	2179	99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load