


Cartridge

45 Colt (Ruger and T/C) - 250 grain

Version 9.0

NOSLER®

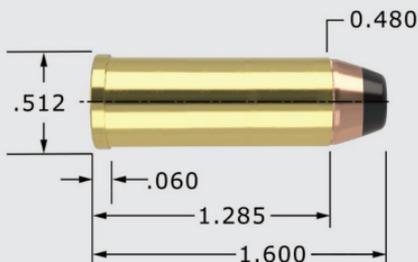

45 Colt (Ruger and T/C) - 250 grain

45 Cal. (.451")

MAXIMUM O.A.C.L.		1.600"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®		SHG 250 gr. JHP	1.590"	0.177	0.176
CASE TYPE:	Winchester	PRIMER TYPE	WLP		
CASE HOLDS:	27.0 Gr. WATER	BARREL Length/Make	12" Contender		
		BARREL Twist	1-16"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA #5	12.0 * MAX.	933	47%		
	11.5	876	45%		
	11.0	820	43%		
AA #7	15.0 MAX.	968	56%		
	14.5	897	55%		
	14.0 *	827	53%		
N110	19.2 MAX.	1090	94%		
	18.7 *	1054	91%		
	18.2	1018	89%		
2400 Most Accurate Powder Tested	20.0 * MAX.	1104	84%		
	19.5	1074	82%		
	19.0	1044	80%		
IMR 4227	25.0 * MAX.	1119	**	110%	
	24.5	1087	**	108%	
	24.0	1056	**	106%	
AA #9	18.0 MAX.	1139	71%		
	17.5	1082	69%		
	17.0 *	1025	67%		
Unique	11.3 MAX.	1159	71%		
	10.8	1116	68%		
	10.3 *	1072	65%		
Hi-Skor 800-X	13.8 MAX.	1273	81%		
	13.3	1224	78%		
	12.8 *	1176	75%		
Lil'Gun	25.0 MAX.	1402	97%		
	24.5 *	1377	96%		
	24.0	1353	94%		
W296	25.0 MAX.	1420	94%		
	24.5 *	1383	93%		
	24.0	1346	91%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load