


Cartridge

6.5x55 - 100 grain

Version 9.0

NOSLER®

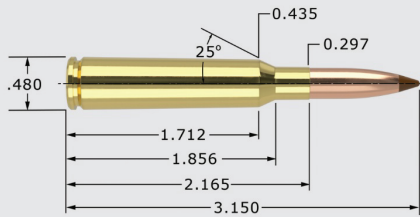

6.5x55 - 100 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.150"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	100gr. Spitzer	3.025"	0.350	0.205
Custom Competition®	CC	100gr. HPBT	3.025"	0.362	0.205
Partition®	PT	100gr. Spitzer	3.025"	0.326	0.205

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	55.3 Gr. WATER	BARREL Length/Make	23" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
-------------	------------------	--------------------	-----------------------

Varget	43.5 * MAX.	3091	85%
Most Accurate	41.5	2992	81%
Powder Tested	39.5	2894	77%
H4831	51.0 MAX.	3117	96%
	49.0	2999	92%
	47.0 *	2882	89%
W760	47.5 MAX.	3118	90%
	45.5	3002	86%
	43.5 *	2885	82%
N150	42.0 * MAX.	3120	89%
	40.0	3010	85%
	38.0	2899	81%
IMR 4350	48.0 MAX.	3127	93%
	46.0	2973	89%
	44.0 *	2819	85%
Big Game	47.0 MAX.	3148	87%
	45.0 *	3039	83%
	43.0	2930	79%
RL19	51.5 * MAX.	3163	** 101%
	49.5	3018	97%
	47.5	2874	93%
N160	50.5 MAX.	3169	** 101%
	48.5	3042	97%
	46.5 *	2915	93%
RL15	43.5 MAX.	3188	82%
	41.5	3066	78%
	39.5 *	2944	74%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load