


Cartridge

7.62x39 - 123 grain

Version 9.0

NOSLER®

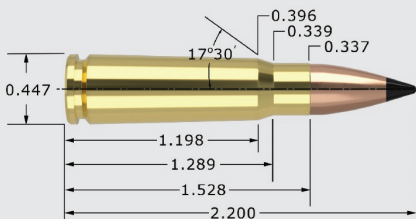

7.62x39 - 123 grain

7.62mm (.310")

MAXIMUM SAAMI O.A.C.L.		2.200"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	123gr. Spitzer	2.190"	0.310	0.183
Expansion Tip®	ET	123gr. Spitzer	2.175"	0.316	0.183
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Varmageddon®	VMG	123gr. FB Tipped	2.190"	0.304	0.183
CASE TYPE:	Lapua	PRIMER TYPE	WLR		
CASE HOLDS:	27.7 Gr. WATER	BARREL Length/Make	22"		
		BARREL Twist	1-9.5"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 2015	28.0 MAX.	2312		**	115%
	27.0	2251		**	111%
	26.0 *	2189		**	107%
H322	28.0 MAX.	2342		**	109%
	27.0	2277		**	105%
	26.0 *	2213		**	101%
N120	24.0 * MAX.	2343		**	106%
	23.0	2197		**	101%
	22.0	2051			97%
AA 1680	26.0 * MAX.	2430			99%
	25.0	2402			95%
	24.0	2374			91%
H4198	25.5 * MAX.	2433		**	103%
Most Accurate	24.5	2334			99%
Powder Tested	23.5	2235			95%
RL7	27.0 * MAX.	2488		**	106%
	26.0	2394		**	102%
	25.0	2301			98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load