


Cartridge

7mm-08 Rem - 120 grain

Version 9.0

NOSLER®

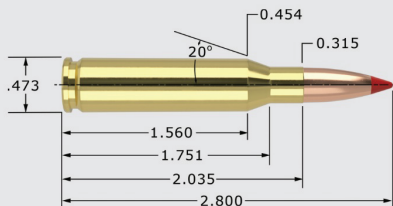

7mm-08 Rem - 120 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.			2.800"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®			BT	120gr. Spitzer	2.800"	0.417 0.213
CASE TYPE:	Nosler		PRIMER TYPE			WLR
CASE HOLDS:	50.4	Gr. WATER	BARREL Length/Make			26" Wiseman
			BARREL Twist			1-9"
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4895	43.0	MAX. 3040				93%
	41.0	2950				89%
	39.0 *	2860				84%
IMR 4064	43.0	MAX. 3052				94%
	41.0	2917				90%
	39.0 *	2782				86%
IMR 4350	49.0	MAX. 3055			**	104%
	Most Accurate	47.0	2934			100%
	Powder Tested	45.0 *	2813			95%
H4895	42.5	MAX. 3090				93%
	40.5	2960				88%
	38.5 *	2830				84%
N150	45.5 *	MAX. 3111			**	106%
	43.5	2994			**	102%
	41.5	2877				97%
RL15	44.0	MAX. 3118				91%
	42.0	2983				87%
	40.0 *	2848				83%
Varget	45.0	MAX. 3139				97%
	43.0 *	3017				92%
	41.0	2895				88%
H414	50.5 *	MAX. 3180			**	104%
	48.5	3060				100%
	46.5	2940				96%
W760	52.0	MAX. 3232			**	108%
	50.0	3123			**	104%
	48.0 *	3014				100%
Big Game	52.0	MAX. 3267			**	105%
	50.0 *	3181			**	101%
	48.0	3095				97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load