


Cartridge

7mm Rem Ultra Mag - 175 grain

Version 9.0

NOSLER®

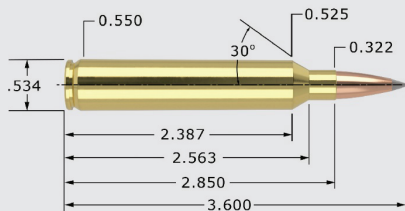

7mm Rem Ultra Mag - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.			3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range			ABLR 175gr. Spitzer	3.570"	0.648	0.310
Partition®			PT 175gr. Spitzer	3.570"	0.519	0.310
CASE TYPE:	Nosler		PRIMER TYPE			WLRM
CASE HOLDS:	98.2	Gr. WATER	BARREL Length/Make			26" Wiseman
			BARREL Twist			1-9"
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H50BMG	96.0	MAX. 2936		**	101%	
	94.0	2869			99%	
	92.0 *	2801			97%	
H4831	81.5	MAX. 3017			86%	
	79.5	2967			84%	
	77.5 *	2916			82%	
RL22	82.0	MAX. 3057			91%	
	80.0	2990			89%	
	78.0 *	2923			86%	
H1000	87.0	MAX. 3066			94%	
	85.0	3025			92%	
	83.0 *	2985			89%	
Magnum	89.0	MAX. 3079			92%	
	87.0	3014			90%	
	85.0 *	2949			88%	
IMR 7828 Most Accurate Powder Tested	83.0	MAX. 3083			90%	
	81.0	3012			88%	
	79.0 *	2942			86%	
N560	84.0	MAX. 3093			95%	
	82.0	3022			93%	
	80.0 *	2951			91%	
RL25	86.0	MAX. 3139			95%	
	84.0 *	3019			93%	
	82.0	2899			91%	
US869	102.0	MAX. 3154		**	107%	
	100.0	3088		**	104%	
	98.0 *	3022		**	102%	
Retumbo	92.0 *	MAX. 3158		**	101%	
	90.0	3087			99%	
	88.0	3016			96%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load